

**EA-Series Hydraulic Couplings**

**Features**

- Plug mounted sleeve guard protects against accidental disconnection
- Smooth bore full-flow design ensures maximum flow with minimal pressure drop
- Steel body components maximize service life by resisting the effects of brinelling and internal erosion
- Heavy duty knurled sleeve with locking pin provides maximum protection against brinelling and accidental disconnection
- Interchangeable with Parker WB, Aeroquip FD69, and Snap Tite 56

**Specifications**

- Nitrile rubber seals are standard, providing a temperature range of **-40°F to 250°F** (-40°C to 121°C)
- Pressure rating **10000 PSI** at 70°F (21°C)

**Water-Blast Couplers**



| Body Size | Female Threads | Steel Part # |
|-----------|----------------|--------------|
| 1/2"      | 3/8" - 18 NPTF | 4EAF3        |
|           | 1/2" - 14 NPTF | 4EAF4        |

**Water-Blast Plugs**



| Body Size | Female Threads | Steel Part # |
|-----------|----------------|--------------|
| 1/2"      | 3/8" - 18 NPTF | EA4F3        |
|           | 1/2" - 14 NPTF | EA4F4        |


**Water-Blast Seal Kits**

| Body Size | Coupler Style | Seal Kit Contents            | Nitrile Part # |
|-----------|---------------|------------------------------|----------------|
| 1/2"      | all           | body O-ring and PTFE back-up | 4EA-SKIT       |

| Body Size | Coupler Style | Seal Kit Contents            | FKM Part # |
|-----------|---------------|------------------------------|------------|
| 1/2"      | all           | body O-ring and PTFE back-up | F-4EA-SKIT |

| Body Size | Coupler Style | Seal Kit Contents            | EPDM Part # |
|-----------|---------------|------------------------------|-------------|
| 1/2"      | all           | body O-ring and PTFE back-up | P-4EA-SKIT  |

**Plug Profile**

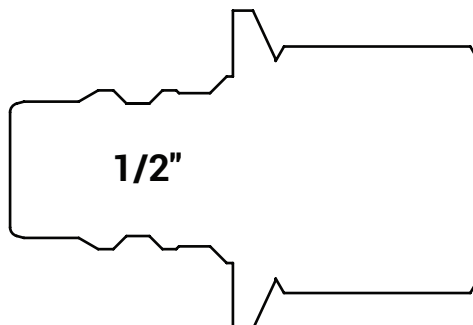

K